


## “GF20KG” SERIES FAN FILTERS


Description: Fan Filter 115/230/400 Va.c.




### technical drawing

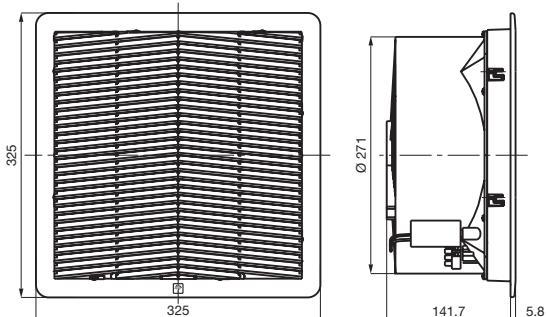

### mounting cut-out

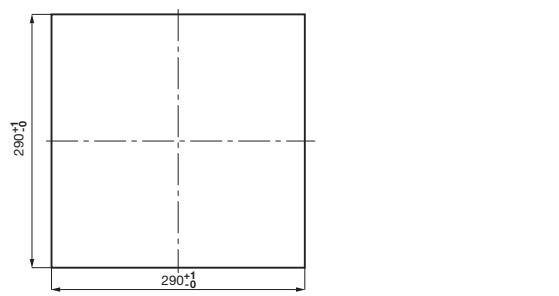

<b>Type of material:</b>	ABS/PC alloy
<b>Standard colour:</b>	RAL 7035 - other colors on request
<b>Protection degree:</b>	IP54, according to EN 60529 standard
<b>Fixing system:</b>	hook tightened by a screw (torque wrench setting 0.5 Nm)
<b>Plate thickness:</b>	up to 8 mm and up to 16 mm by cutting the jacks
<b>Storage temperature:</b>	from -45°C to +75°C
<b>Lifetime L10 at 40°C:</b>	45,000 h
<b>Motor protection:</b>	impedance
<b>Electrical connection:</b>	by terminal block 3 poles L-N-PE
<b>Earth connection:</b>	(by terminal block, PE pole)
<b>Appliance class:</b>	class I
<b>Type of filter media:</b>	thermo-linked progressive structure synthetic fibre
<b>Filtering class:</b>	class G3, according to EN 779
<b>Degree of separation:</b>	85% - DIN 24185
<b>Dust retention capacity:</b>	600 g/m²
<b>Note:</b>	filter media is washable for about 10 times
<b>Weight:</b>	3.70 Kg
<b>Approvals:</b>	CE

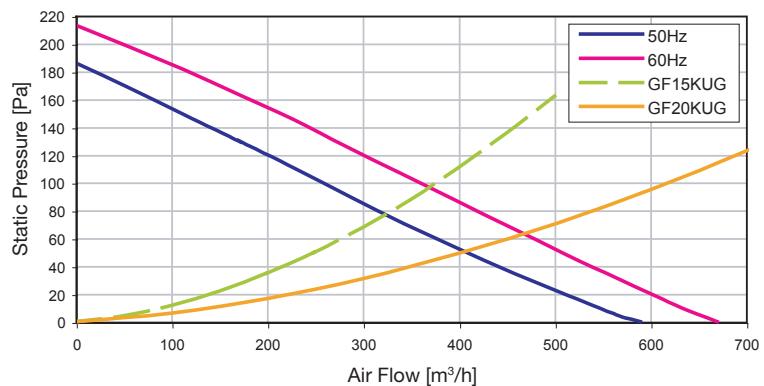

Model	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow (*)	Static Pressure	Noise	Rated Temp. Range
	(V)	(Hz)	(mA)	(W)	(m³/h)	(Pa)	[dB(A)]	(°C)
GF20KGU115B	115 a.c.	50/60	1,071/1,290	112/148	590/670	186/213	71/73	-10 ~ +55
GF20KGU230B	230 a.c.	50/60	60/68	138/164	590/670	186/213	71/73	-10 ~ +55
GF20KGU400TB	400 3~	50/60	180/200	93/123	590/670	186/213	71/73	-10 ~ +55

(\*) data with uncertainty of 15%

All specifications, data and drawing are subject to change without notice and are approximate.  
Please refer to our terms of sales including our warranty and limited liabilities clauses.