


“GF” SERIES FILTER UNITS

Description: Filter






- Type of material:** ABS/PC alloy
- Standard colour:** RAL 7035 - other colors on request
- Protection degree:** IP54, according to EN 60529 standard
- Fixing system:** hook tightened by a screw (torque wrench setting 0.5 Nm)
- Plate thickness:** up to 8 mm and up to 16 mm by cutting the jacks
- Storage temperature:** from -45°C to +75°C
- Type of filter media:** thermo-linked progressive structure synthetic fibre
- Filtering class:** class G3, according to EN 779
- Degree of separation:** 85% - DIN 24185
- Dust retention capacity:** 600 g/m²
- Note:** filter media is washable for about 10 times
- Approvals:** CE

technical drawing

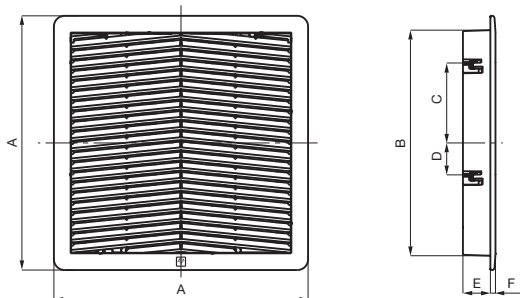

mounting cut-out

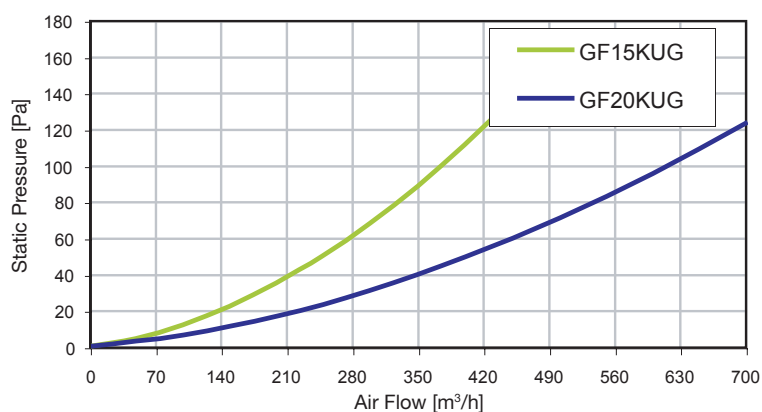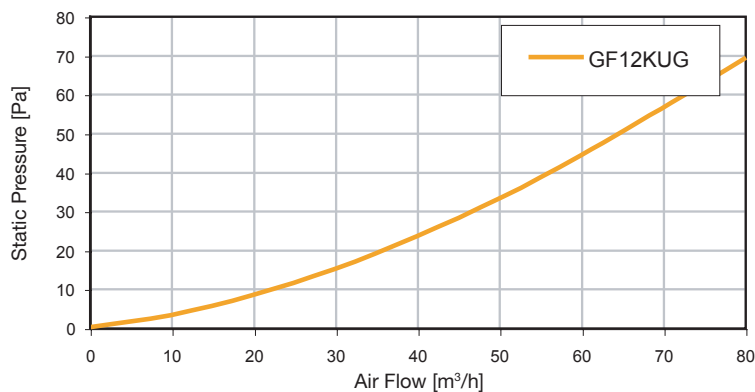

maximum deviation of pressure drop is 10%

Model	A	B	C	D	E	F	G	Cross section free without media	Weight
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(cm ²)	(Kg)
GF12KUG	150	124	41.6	-	26.5	4.5	125	94	0.180
GF15KUG	250	222	78.6	31.4	27	5	223	301	0.370
GF20KUG	325	289	95.6	48.4	26.7	5.8	290	580	0.860

GFT_F28E/0_vl_gf_filters

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.